


Lifting & Lashing Points

Selection Guide



• LIFTING & LASHING SYSTEMS • VIP 100 SLING CHAINS & COMPONENTS • ICE 120 SLING CHAINS & COMPONENTS •

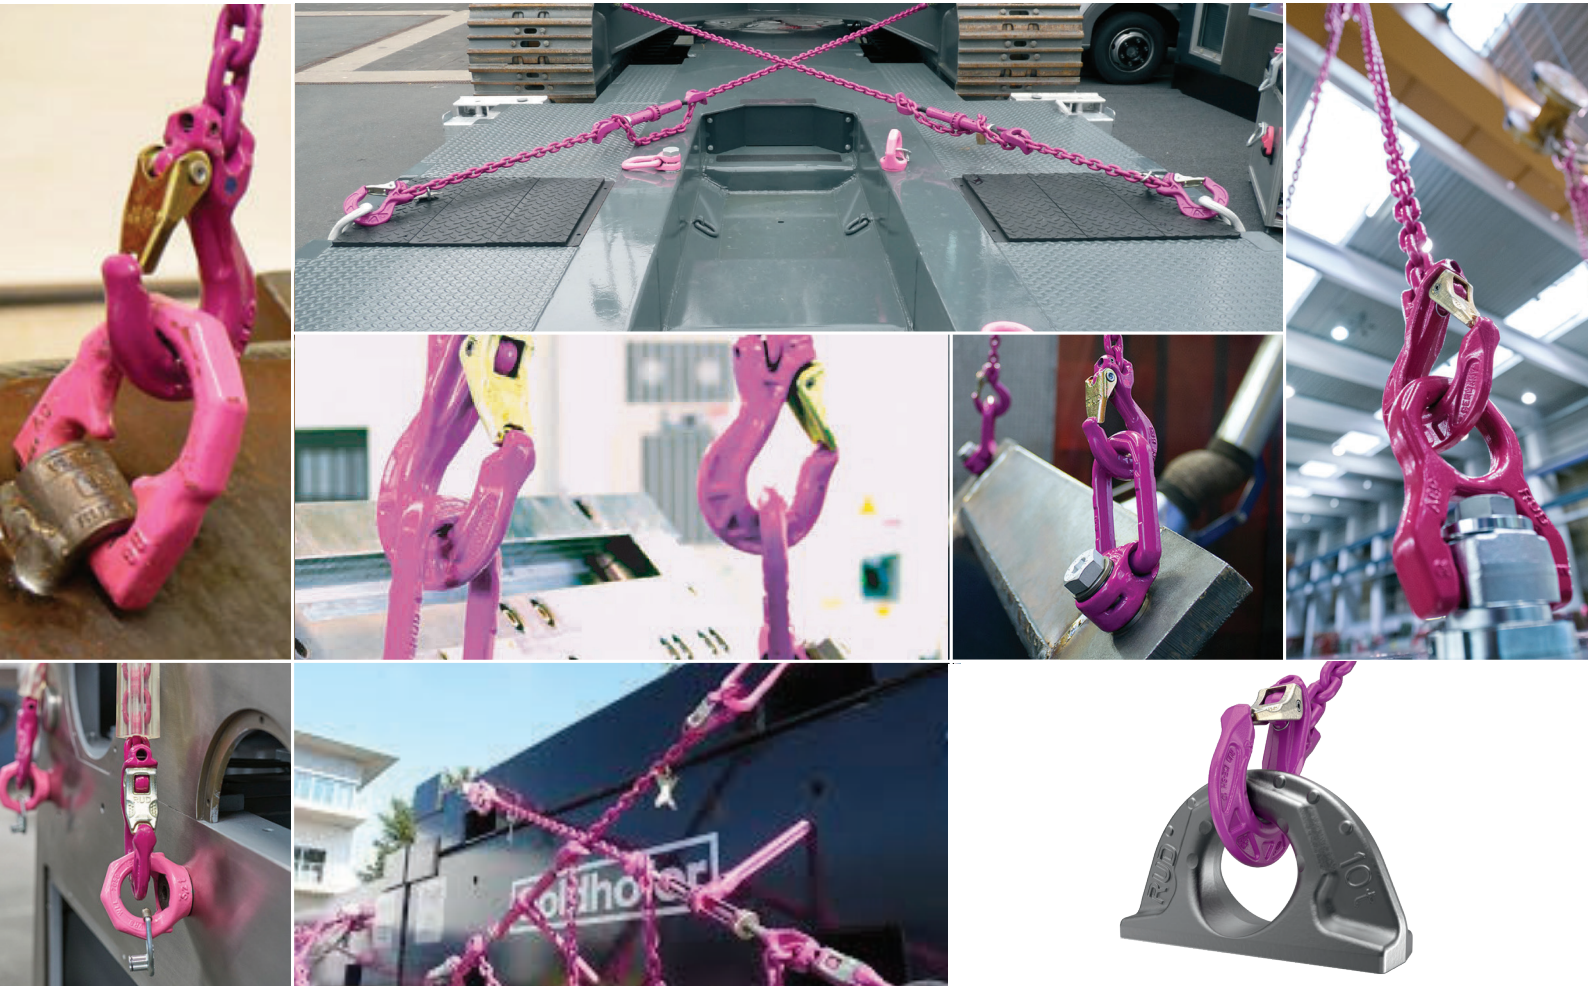



Working Load Limits (G - in tonnes)

Single Leg

2, 3 or 4 Leg



VLBG-PLUS




Description	Single Leg	60°	90°	120°
VLBG-PLUS 0.63t M8	0.63	1.1	0.89	0.63
VLBG-PLUS 0.90t M10	0.90	1.6	1.3	0.90
VLBG-PLUS 1.35t M12	1.35	2.3	1.9	1.35
VLBG-PLUS 2t M16	2.0	3.5	2.8	2.0
VLBG-PLUS 3.5t M20	3.5	6.1	4.9	3.5
VLBG-PLUS 4.5t M24	4.5	7.8	6.3	4.5
VLBG-PLUS 6.7t M30	6.7	11.6	9.4	6.7
VLBG-PLUS 8t M36	8.0	13.8	11.3	8.0
VLBG-PLUS 10t M42	10.0	17.3	14.1	10.0
VLBG-PLUS 15t M42	15.0	26.0	21.1	15.0
VLBG-PLUS 20t M48	20.0	34.6	28.2	20.0

VLBS




VLBS 1.5t	1.5	2.6	2.1	1.5
VLBS 2.5t	2.5	4.3	3.5	2.5
VLBS 4t	4.0	6.9	5.6	4.0
VLBS 6.7t	6.7	11.6	9.4	6.7
VLBS 10	10.0	17.3	14.1	10.0
VLBS 16t	16.0	27.7	22.6	16.0

ABA



ABA 0.8t	0.8	1.4	1.1	0.8
ABA 1.6t	1.6	2.8	2.2	1.6
ABA 3.2t	3.2	5.5	4.5	3.2
ABA 5t	5.0	8.6	7.0	5.0
ABA 10t	10.0	17.3	14.1	10.0
ABA 20t	20.0	34.6	28.2	20.0
ABA 31.5t	31.5	54.5	44.4	31.5

ACP-TURNADO



ACP M12	1.35	2.3	1.9	1.35
ACP M16	2.5	4.3	3.5	2.5
ACP M20	4.0	6.9	5.6	4.0
ACP M24	6.3	10.9	8.9	6.3
ACP M30	8.0	13.8	11.3	8.0
ACP M36*	12.5	21.6	17.6	12.5
ACP M42*	16.0	27.7	22.6	16.0

VRS-F



Description	F1	F2	60°	90°	120°
VRS-F / VRM M6	0.50	0.10	0.17	0.14	0.10
VRS-F / VRM M8	1.0	0.30	0.52	0.42	0.30
VRS-F / VRM M10	1.0	0.40	0.69	0.56	0.40
VRS-F / VRM M12	2.0	0.75	1.3	1.1	0.75
VRS-F / VRM M16	4.0	1.5	2.6	2.1	1.5
VRS-F / VRM M20	6.0	2.3	4.0	3.2	2.3
VRS-F / VRM M24	8.0	3.2	5.5	4.5	3.2
VRS-F / VRM M30	12.0	4.5	7.8	6.3	4.5
VRS-F M36	16.0	7.0	12.1	9.9	7.0
VRS-F M42	24.0	9.0	15.6	12.7	9.0
VRS-F M48	32.0	12.0	20.8	16.9	12.0

* Stamped with F2 WLL

Distributed by



A TABMEA COMPANY