PACIFIC HOISTS
INVENT THE FUTURE

Distributed by
NOBLES
A TASMEA COMPANY

## Pacific Porta Hoists

The Pacific Porta Hoists are compact, lightweight 240 volt single phase electric chain hoists. They conveniently come in durable travel case which makes them the ideal portable solution for lifting, lowering and handling loads up to 500kg. All models are tested to the Australian standards.

## Features:

- All Pacific Porta Hoists are manufactured to comply with AS1418.2.
- All models suitable for 240 volt, 50 Hz single phase power supply.
- Available in 80kg, 125kg, 250kg and 500kg capacities.
- Duty cycle rated at 30% ED with 180 starts per hour
- 18 volt DC low voltage control for safe operation.
- IP65 pendant control, dual speeds with variable speed slow control for raise and lower.
- Overload protection clutch prevents damage caused by overloading.
- All models are supplied as standard with 6 metre height of lift, a 5 metre pendant control, chain bucket and 3 metre power supply cable.
- Upper and lower electrical limit switches.
- Supplied with durable travel case.

PACIFIC HOISTS
INVENT THE FUTURE

The information shown is to be used as a guide only. Specifications are subject to change without notice. All materials handling or lifting jobs should be assessed individually. Pacific Hoists products are NOT to be used for lifting or lowering persons.

# Specifications

| Model | PPH080 | PPH125 | PPH240 | PPH500 |
|---|---|---|---|---|
| Stock Code | PPH080 | PPH125 | PPH240 | PPH500 |
| Rated Capacity (kg) | 80 | 125 | 250 | 500 |
| Standard Lift Heigh (m) | 6 | 6 | 6 | 6 |
| Pendant Length (m) | 5 | 5 | 5 | 5 |
| Power Supply 50Hz (volt) | 240 | 240 | 240 | 240 |
| Chain Dimension (mm) | 4.0 x 12 | 4.0 x 12 | 4.0 x 12 | 4.0 x 12 |
| Motor Power (kW) | 0.3 | 0.3 | 0.6 | 0.6 |
| Speed (m/min) | 0 - 4.8 (variable) / 18 | 0 - 3.2 (variable) / 12.5 | 0 - 3.2 (variable) / 12.5 | 0 - 1.6 (variable) / 6.3 |
| IP Rating | 54 | 54 | 54 | 54 |
| E.D. Rating (%) | 30 | 30 | 30 | 30 |
| Load Chain Fall No. | 1 | 1 | 1 | 2 |
| Weight (kg) | 17.5 | 17.5 | 17.5 | 20.6 |

*Additional height of lift is available upon request. Please note that this may vary the size and weight of the hoist and therefore may not fit into the travel case.

# Dimensions (in mm)

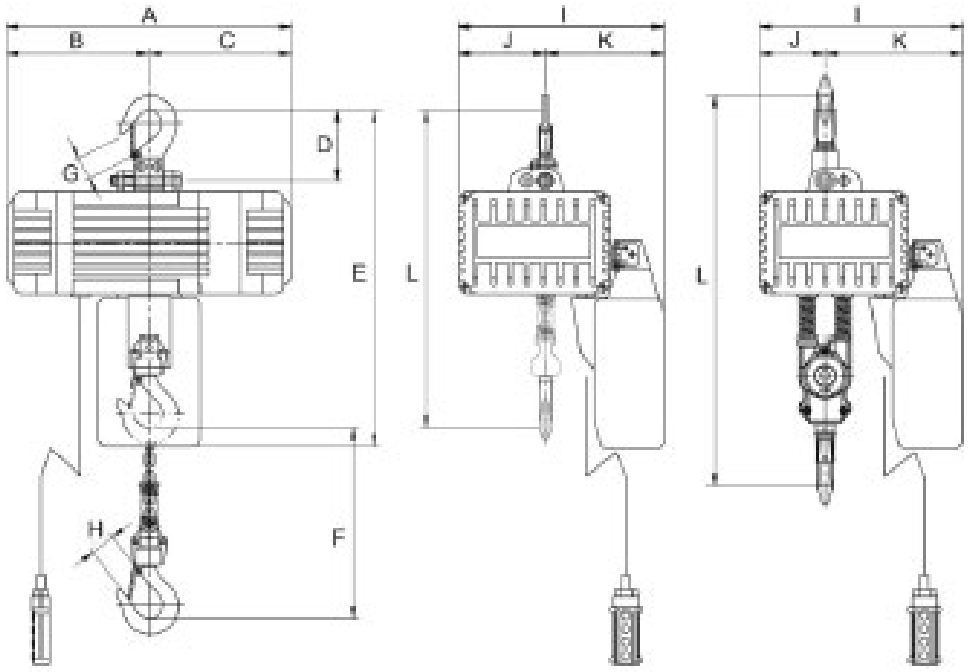

PACIFIC HOISTS
INVENT THE FUTURE

The information shown is to be used as a guide only. Specifications are subject to change without notice. All materials handling or lifting jobs should be assessed individually. Pacific Hoists products are NOT to be used for lifting or lowering persons.

# Specifications

| Model | PPH080 | PPH125 | PPH240 | PPH500 |
|---|---|---|---|---|
| A | 364 | 364 | 364 | 364 |
| B | 182 | 182 | 182 | 182 |
| C | 182 | 182 | 182 | 182 |
| D | 89 | 89 | 89 | 89 |
| E | 423 | 423 | 423 | 423 |
| F | 6m Lift | 6m Lift | 6m Lift | 6m Lift |
| G | 25 | 25 | 25 | 25 |
| H | 25 | 25 | 25 | 25 |
| I | 260 | 260 | 260 | 260 |
| J | 108 | 108 | 108 | 84 |
| K | 152 | 152 | 152 | 176 |
| L | 400 | 400 | 400 | 494 |

Distributed by
NOBLES
A TASMEA COMPANY
1300 711 559
sales@nobles.com.au